


A NOTE ON S-100 BOARD PLACEMENT

Your S-100 system's performance can be affected by placement of the boards on the system bus, especially at clock speeds in excess of 2 MHz. To achieve the maximum reliability from your system, you should adhere to the following simple rules regarding the placement of individual boards on the bus:

1. Since most of the bus activity is between the CPU and memory, locate memory cards as close as possible to the CPU.
2. On a terminated bus, the CPU should be the furthest board from the bus termination, with all other board located between the CPU and the termination.

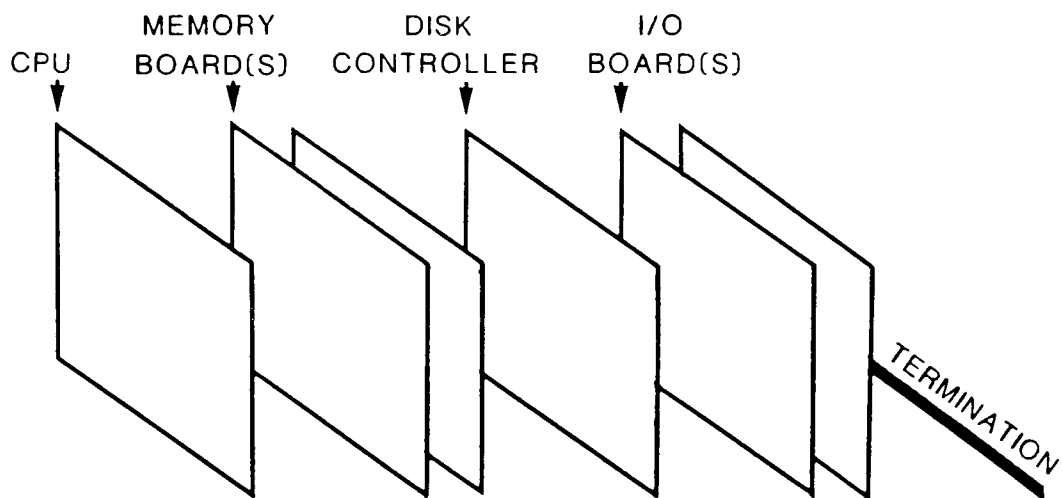

EXAMPLE OF BOARD PLACEMENT